
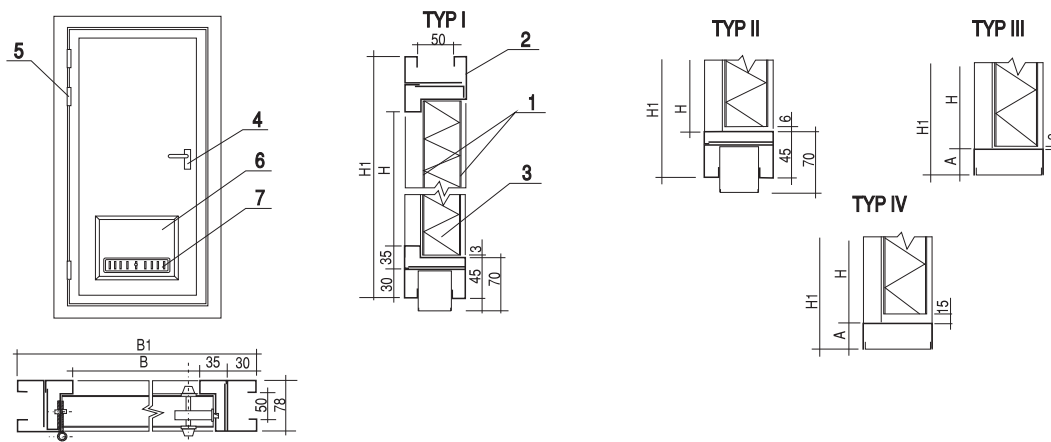


H		1700	1800	1900	2000	2100	2150
B		600	700	800	900	1000	
B1		B+130					
H1 typ I	mm	1830	1930	2030	2130	2230	2280
H1 typ II	mm	1810	1910	2010	2110	2210	2260
H1 typ III,IV	mm	1785	1885	1985	2085	2185	2235
A typ III,IV	mm	20, 30					
MASA	kg/m2	dla B ≤ 700		42			
		dla B > 700		38			

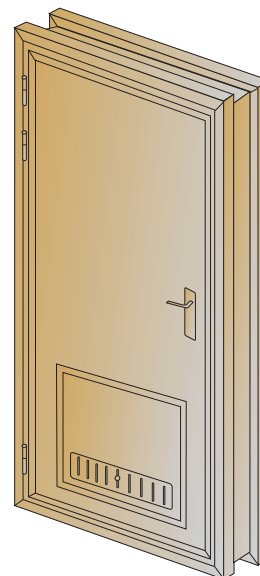

SOUND REDUCTION INDEX: leaf without kick-out panel and ventilation grille **Rw=35 dB**,
leaf with kick-out panel **Rw=35 dB**,
leaf with kick-out panel and ventilation grille **Rw=29 dB**.

MATERIALS: 2 rivetted cassettes of galvanized steel sheet 0,7 mm thick, coated with PCV foil /1/, steel sheet 1,5 mm thick /2/, mineral wool of appropriate density /3/, cylinder lock or sanitary lock (**Sz** - name plate from hinges side, **Sp** - name plate from back side) /4/, hinges /5/, emergency exit (**A**) /6/, ventilation grille (**Wd**=250 cm², **Wm**=125 cm²) /7/.

EXAMPLE OF DESIGNATION: DOOR B15 1850x800-II-LAWm-Ral8011-B14Y/F25A KK18-04/B-17-002